



397 Route 281 – P.O. Box 1175
 Tully, New York 13159-1175
 Phone: 315 696-6676
 Fax: 315 696 9923
 Email: sales@acipower.com
 www.acipower.com

ACI-A036032-1698

PRODUCT DATA SHEET

I-LITE, 6.9 WATT LED DRIVER

(Common-cathode, six channel 15-36V, 0-32mA)

10/2/07

GENERAL DESCRIPTION

The ACI-A036032-1698 is designed to drive up to 6 parallel channels of series connected LED's. Each series channel can provide an adjustable 0 to 32mA of output current into a maximum forward voltage of 36V.

Operating as a true constant current source the driver provides a complete integrated solution that operates from a nominal +12V source.

Simple to connect and operate, the driver solution is capable of providing precise control to support dimming applications of over 5000:1.

This unit feature's enable and intensity control inputs. Additionally, an on-board rotary switch allows the user to select any of 4 specific maximum output current levels.

MECHANICAL / ENVIRONMENTAL

Weight = 7.2 grams

Altitude = 35,000 Ft maximum

Humidity < 95% non-condensing


Size (L x W x H) = 2.0 IN x 0.95 IN x 0.285 IN

PCB thickness = 0.062 IN

Input power & control connector = CON1

LED output connector(s) = CON2, CON3

RoHS compliant

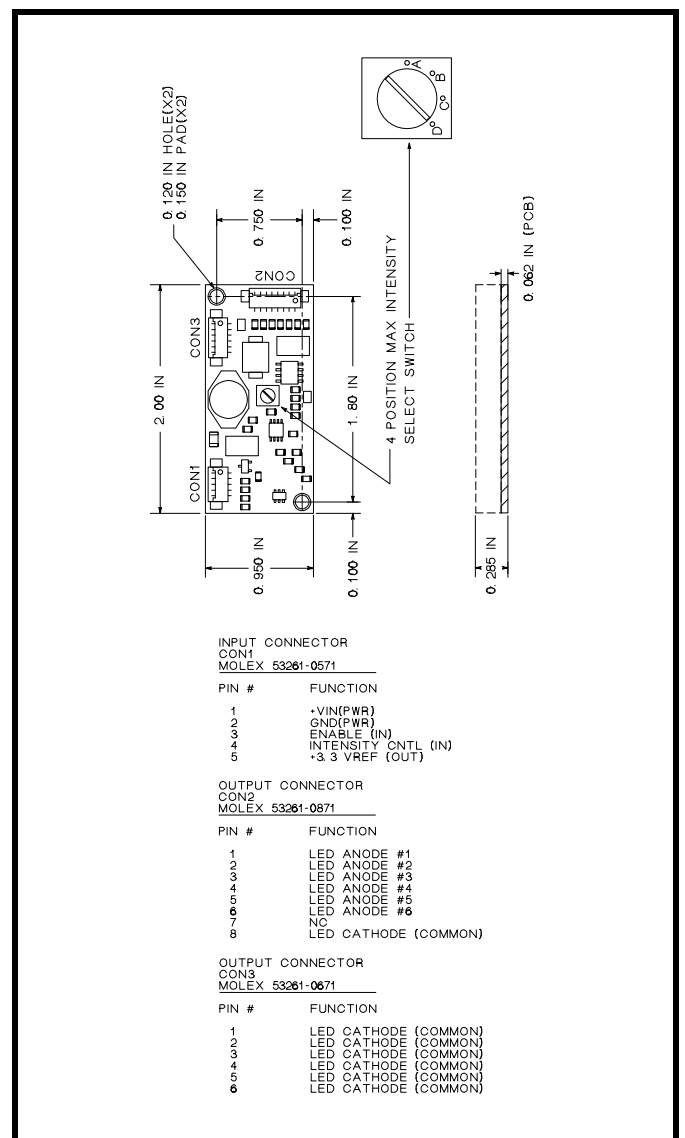



ACI-A036032-1698

397 Route 281 – P.O. Box 1175
 Tully, New York 13159-1175
 Phone: 315 696-6676
 Fax: 315 696 9923
 Email: sales@acipower.com
 www.acipower.com

PRODUCT DATA SHEET

10/2/07

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.3 to 15	Vdc
Vip	Voltage applied to any input pin (Referenced to ground)	-0.3 to 3.6	Vdc
Iop	Current sourced or sinked from any output control pin	+/- 10	madc
Pin	Input power (DC input voltage x DC input current)	9.0	Watts
Top	Operating temperature (Still air ambient around inverter)	-20 to +85	Deg-C
Tstg	Storage Temperature	-40 to +105	Deg-C

* Maximum ratings are those values beyond which damage to the LED driver may occur

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.8	13.2	Vdc
Vf	Series connected cumulative LED forward-drop voltage	18	32	Vdc
Icntl	LED intensity control voltage	0.25	3.0	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 29Vdc, Icntl = +3.0V, Enable = +3.0V, S1 = A unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
OCV	Open circuit voltage	No load	45	50	55	Vdc
Iout-a	Output current per channel, setting A	S1 = A	30.4	32	33.6	madc
Iout-b	Output current per channel, setting B	S1 = B	22.8	24	25.2	madc
Iout-c	Output current per channel, setting C	S1 = C	15.2	16	16.8	madc
Iout-d	Output current per channel, setting D	S1 = D	7.6	8	8.4	madc
Iadj	Nominal output current adjust range	Icntl (Pin 4) = +0.25V to +3.0V	0		32	madc
ENoff	Enable control, unit OFF	Enable (Pin 3)			0.4	Vdc
ENon	Enable control, unit ON	Enable (Pin 3)	1.8			Vdc
+3.3Vref	+3.3 volt output reference voltage	1k load to ground (Pin 5)	3.13	3.3	3.47	Vdc
Iin	Input current draw			0.52		Adc
Iind	Input current draw (Disabled)	Enable (Pin 3) = 0V		1.0		madc
Eff	Electrical Efficiency			90		%



ACI-A036032-1698

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET

GRAPHS

10/2/07

